

GRADALL® XL 5100 III



XL 5100 III

SPECIFICATIONS

Undercarriage

6 x 4 or 6 x 6
Wheelbase: 171" (4.34m)
Width 102" (2.6m)

Frame:
48" (1.2m) wide, welded plate design
65 ksi material

Gross vehicle axle weight rating:
6 x 4 66,000 lb (29,937 kg)
6 x 6 69,000 lb (31,928 kg)

Front axles:
6 x 4: Meritor Model MFS-16-122A, 16,000 lb (7,257 kg) rating
6 x 6: Meritor Model MX19-145, 19,000 lb (8,618 kg) rating, 7.17 ratio

Rear axle:
Meritor Model RT-50-160, 50,000 lb (22,680 kg) rating, 7.17 ratio, single reduction with driver controlled differential lock in front/rear and interaxle differential with lock.

Suspension:
Front: 8 leaf spring with automatic lock-out cylinders
Rear: Hendrickson Equalizer Beam, 8" oscillation

Brakes:
6 x 4 Front: Meritor "Q" Plus Series Cam-Master
Size: 16.5" x 5" (419 mm x 152 mm)
Automatic Slack Adjusters

6 x 6 Front: Meritor "Q" Series Cam-Master
Size: 16.5" x 6" (419 mm x 127 mm)
Automatic Slack Adjusters

Rear: Meritor "P" Series Cam-Master
Size: 16.5" x 7"
(419 mm x 178 mm)
Automatic Slack Adjusters

Spring brake system incorporates emergency and parking brakes on the rear axle. Heated air dryer.

Wheels:
Hub piloted disc 10-stud, 11.25" (286 mm) bolt circle.

Tires:
6x4 front: 385/65R225 18-ply on/off highway tread
6x6 front: 425/65R225 18-ply on/off highway traction tread
6x4 and 6x6 rear: 11R245 on/off highway traction tread

Steering:
Ross, integral hydraulic power steering. Gear type power steering pump. 4-quart power steering reservoir with filter.

Standard chassis equipment:
Halogen headlights, tail lights, back-up lights and alarm, stoplights, identification lights front and rear, directional lights, 4-way hazard lights, and instrument panel lights. Windshield wiper/washer, West Coast style mirror system with plane and convex mirrors, front and rear tow hooks, desiccant type air dryer with automatic purge valve and thermostatically controlled heater.

Hydraulic System

PUMPS
One load-sensing axial piston pump; 0-77 GPM (0-291 L/min) total.
One gear pump (pilot & cooling) 11 gpm (41 L/min)

SYSTEM SPECIFICATIONS

Four double acting cylinders

- 1 Boom Cylinder: 3.75" (95mm) bore x 2.75" (70mm) rod x 168 (4267mm) stroke
- 2 Hoist Cylinders: 4.75" (121mm) bore x 3.347" (85mm) rod x 30.5 (775mm) stroke
- 1 Tool Cylinder: 5.0" (127mm) bore x 3.0" (76mm) rod x 25.9" (658mm) stroke

Four hydraulic motors
Swing, 68 Hp (51kW); tilt, 21 Hp (16kW); two remote drive, 88 Hp (65kW) total.

Operating pressures

| | | |
|---------------|-------|---------------------|
| Hoist | | 4,800 psi (331 Bar) |
| Tilt | | 2,500 psi (172 Bar) |
| Swing | | 4,500 psi (310 Bar) |
| Tool | | 4,800 psi (331 Bar) |
| Telescope | | 4,800 psi (331 Bar) |
| Remote Propel | | 3,750 psi (258 Bar) |
| Pilot system | | .500 psi (35 Bar) |

Oil capacity
Reservoir 50 gallons (189 L), system 70 gallons (265 L). Pressurized reservoir with visual oil level gauges.

Filtration system
10 micron return filter.
10 micron pilot filter.

Fin and tube-type oil cooler with thermostatically controlled cooling fan.

Pressure-compensated, load-sensing valves with circuit reliefs in all circuits.

Chassis Cab

One-person cab, left-hand mount, isolated from frame on rubber mounts. Acoustical lining. Sun visor. Gauges for oil pressure, coolant temperature, air tank pressures, fuel level, voltmeter, speedometer with odometer, tachometer with hour meter. Engine monitor lights. Engine shutdown controlled by engine electronics. Indicator lights and controls for front axle engagement (6 x 6 only) and rear axle differential lock. Park brake control. Tinted safety glass. Sliding side windows. Fresh air heater and defroster. Dome light. Air suspension seat with seat belt. Vent in door.

Upperstructure Cab

All-weather cab isolated from frame on rubber mounts. Tinted safety glass windows, skylight, acoustical lining, four-way adjustable operator's seat, dome light, filtered air heater and defroster, AM/FM radio, air conditioning, work light package.

The heat source is provided by a fast response, closed circuit hydraulic heater with 20,000 BTU/Hr. capacity.

Front window slides to overhead storage. Mirrors on right and left sides of the machine. Windshield wiper and washer.

Hydraulic Remote Control

Upperstructure powered by undercarriage hydraulics through hydraulic motors and PTOs on transmission. Travel and steering pedals in upperstructure cab. Digging brakes and front axle lockout cylinders set automatically with travel pedal in neutral. Parking brake controlled by toggle.

Electrically operated alarm mounted on undercarriage signals remote control movement in either direction, reverse movement when driven from undercarriage cab.

Engine

Detroit Diesel OM906 Tier 3 diesel. 4 cycle, inline 6 cylinder, liquid cooled. Turbo/Charge air aftercooled. Off-highway Certified. Electronic controlled. Vertical canister style lube filter attached to engine. Vertical canister style fuel filters, (main and pre-filter) attached to engine. Remote mount primary fuel/water separator. Gross Rating: 275HP @ 2200 RPM. 811 FT LB Torque @ 1200 RPM. Net Rating: 258 HP @ 2200 RPM.

Air Filter: 2-stage dry type with safety element, ejector valve and service indicator.

Electrical System: 12 volt, 100 amp alternator with integral voltage regulator. 2 SAE #C31-S 1000 CCA batteries.

Variable Viscous Fan Clutch System: Fin and tube radiator with fan shroud. 9 blade, 28" diameter fan. Engine charge air cooler mounted in front of radiator. Transmission oil cooler mounted in front of radiator below charge air cooler.

Fuel Tank Capacity: 100 gal (378 L)

Transmission: Eaton Roadranger RTX-14609B, 9-speed FWD, 2-speed reverse. Internal oil pump with external spin-on filter. Transmission oil cooler. Neutral start switch. Input shaft clutch brake. 8-bolt air shifted PTO for hydraulic pump drive. Dual rear countershaft, air shifted PTO's for remote propel motors.

Gear Speeds: (with 285/75R24.5 tires)

| Gear | Lo | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|
| MPH | 3.1 | 5.2 | 7.4 | 10.2 | 14.0 | 20.0 | 28.3 | 39.0 | 53.4 |
| Km/hr | (4.9) | (8.4) | (11.9) | (16.4) | (22.5) | (32.2) | (45.3) | (62.7) | (85.9) |

| Gear | Rev Lo | Rev Hi |
|-------|--------|--------|
| MPH | 3.4 | 13.1 |
| Km/hr | (5.5) | (21.1) |

Clutch: Hydraulic actuated. Spicer Model 107, pull type. 14" dia, 2-plate, organic disc.

Drivelines: Spicer 1760 Series with "Half Round" yokes.

Transfer Case: (6 x 6 only) Meritor Model T-211HD, 1/1 ratio, 3 shaft single speed. With air operated front axle disconnect.

Upperstructure Controls

Two electronic joysticks (hoist & bucket, telescope & swing), one rocker switch (tilt) control upperstructure. Joysticks are mounted on arm pods that are adjustable for individual operator comfort and convenience. Quick change joystick pattern switch located on instrument panel.

Two foot pedals for remote control of undercarriage steering, travel and digging brakes. Rocker switch on control panel selects low speed or high speed remote travel.

Joysticks and pedals are self-centering; when controls are released, power for movement disengages and swing and travel brakes set automatically.

Engine Controls—Auto Idle & Mode Selector.

Key ignition switch with neutral start and indicator lights for low air, engine status, park brake, travel status, hydraulic fluid temperature and level.

Automatic engine shut down occurs with low oil pressure or high coolant temperature.

Swing

Internal swing gear. Priority swing circuit with axial piston motor. Planetary transmission. Swing speed: 8 rpm.

Swing brake: Automatic spring-set/hydraulic release wet disc parking brake. Dynamic braking is provided by the hydraulic system.

GRADALL Model XL 5100_{III} 6x4 Lift Capacity Over Side or Rear - LB. (KG.)

| LOAD POINT HEIGHT | | LOAD RADIUS | | | | | | | | | | |
|--------------------|----------------------------|-------------|-------------|--------------|--------------|--------------|--------------|-------------|-------------|----------------|-------------|-------------|
| | | 10' (3.0m) | | 15' (4.6m) | | 20' (6.1m) | | 25' (7.6m) | | Maximum Radius | Over End | Over Side |
| | | Over End | Over Side | Over End | Over Side | Over End | Over Side | Over End | Over Side | | | |
| Above Ground Level | 20' (6.1m) | | | | | | | 5715 (2590) | 5715 (2590) | 27' 4" (8.3m) | 5070 (2300) | 5070 (2300) |
| | 15' (4.6m) | | | 12425 (5635) | 12425 (5635) | 8795 (3990) | 8795 (3990) | 6515 (2955) | 6515 (2955) | 29' 5" (9.0m) | 5120 (2320) | 5120 (2320) |
| | 10' (3.0m) | | | | | 9880 (4480) | 9880 (4480) | 7140 (3240) | 7140 (3240) | 30' 6" (9.3m) | 5230 (2370) | 5230 (2370) |
| | BOOM LEVEL 8' 8" (2.7m) | | | | | 10080 (4570) | 10080 (4570) | 7255 (3290) | 7255 (3290) | 30' 7" (9.3m) | 5265 (2390) | 5265 (2390) |
| | 5' (1.5m) | | | | | 10290 (4665) | 10030 (4550) | 7415 (3365) | 7175 (3255) | 30' 7" (9.3m) | 5375 (2440) | 5195 (2355) |
| At Ground Level | | | | | | 9815 (4450) | 9800 (4445) | 7265 (3295) | 7035 (3190) | 29' 11" (9.1m) | 5550 (2515) | 5310 (2410) |
| Below Ground Level | 5' (1.5m) | | | 11090 (5030) | 11090 (5030) | 8705 (3950) | 8705 (3950) | 6745 (3060) | 6745 (3060) | 28' 3" (8.6m) | 5740 (2605) | 5725 (2595) |
| | 10' (3.0m) | 8500 (3855) | 8500 (3855) | 8630 (3915) | 8630 (3915) | 7365 (3340) | 7365 (3340) | 6010 (2725) | 6010 (2725) | 25' 5" (7.7m) | 5910 (2680) | 5910 (2680) |
| | 15' (4.6m) | 5840 (2650) | 5840 (2650) | 6640 (3010) | 6640 (3010) | 6075 (2755) | 6075 (2755) | | | 20' 11" (6.4m) | 5930 (2690) | 5930 (2690) |
| | 20' (6.1m) | | | | | | | | | 12' 10" (3.9m) | 4875 (2210) | 4875 (2210) |



Shaded areas are stability rated
Based on machine with 0 lb. bucket

The rated lift capacity is based on the machine being equipped with 15,500 lb. (7030 kg) counterweight, standard boom and no bucket.

The load point is located on the bucket pivot point, including load listed for maximum radius.

Do not attempt to lift or hold any load greater than these rated values at specified load radii and heights. The weight of slings and any auxiliary devices must be deducted from the rated load to determine the net load that may be lifted.

ATTENTION: All rated loads are based on the machine being stationary and level on a firm supporting surface. For safe working loads, the user must make allowance for his particular job conditions such as soft or uneven ground, out of level conditions, side loads, hazardous conditions, experience of personnel, etc. The operator and other personnel must be fully trained and understand the Operator's Manual and Safety Manuals furnished by the manufacturer before operating this machine. Rules for safe operation of equipment must be adhered to at all times.

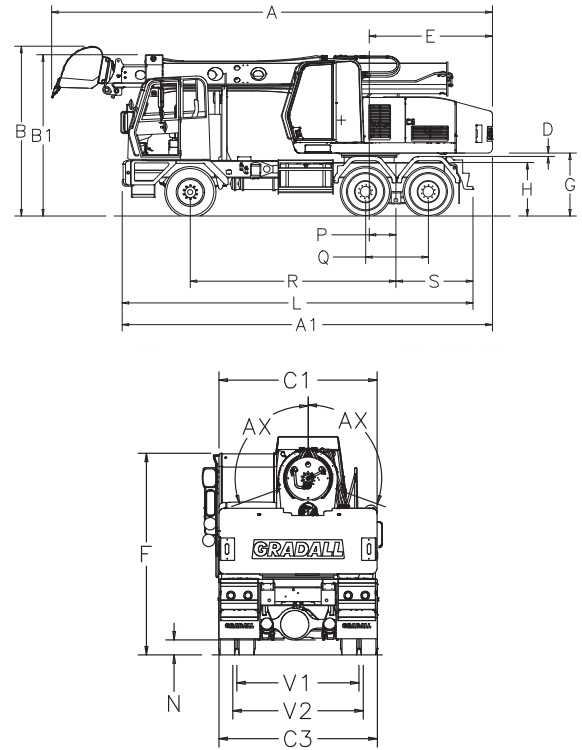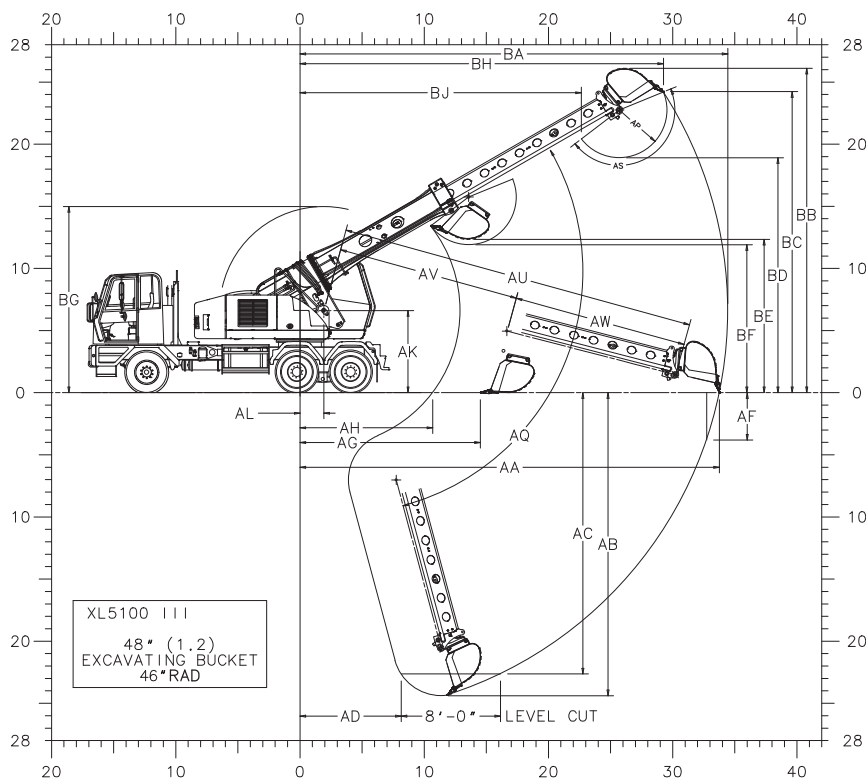

NOMENCLATURE AND DIMENSIONS FOR HYDRAULIC EXCAVATORS-SAE J1193 NOV84

| 6x6 | 6x4 | Description | 6x6 | 6x4 | Description |
|-----|-----------------|---|-----|---------------|--|
| A | 30' 5" (9.3) | Overall length (boom in rack) with bucket | AU | 28' 8" (8.7) | Maximum telescoping boom length (boom pivot to bucket pivot) |
| A1 | 25' 6" (7.8) | Overall length (boom in rack) without bucket | AV | 14' 8" (4.5) | Minimum telescoping boom length (boom pivot to bucket pivot) |
| B | 12' 0" (3.7) | Overall height (boom in rack) with bucket | AW | 14' 0" (4.3) | Telescoping boom travel |
| B1 | 11' 5" (3.5) | Overall height (boom in rack) without bucket | AX | 110° | Bucket tilt angle (both sides of center) |
| C1 | 8' 6" (2.6) | Width of upperstructure | BA | 34' 5" (10.5) | Maximum radius of working equipment |
| C3 | 8' 6" (2.6) | Width of undercarriage | BB | 26' 5" (8.0) | Maximum height of working equipment |
| D | 3" (76mm) | Minimum clearance, upperstructure to undercarriage | BC | 24' 6" (7.5) | Maximum bucket tooth height |
| E | 8' 6" (2.6) | Swing clearance, rear of upperstructure | BD | 19' 2" (5.9) | Minimum clearance of bucket teeth, with bucket pivot at maximum height |
| F | 11' 1" (3.4) | Top of cab to ground line | BE | 12' 7" (3.8) | Minimum clearance of fully curled bucket at maximum boom height |
| G | 56" (1.4) | Clearance, upperstructure to groundline | BF | 12' 2" (3.7) | Minimum clearance of bucket teeth at maximum boom height |
| H | 48" (1.2) | Top of wheel mounted under carriage frame to groundline | BG | 15' 3" (4.7) | Maximum height of working equipment with bucket below groundline |
| L | 24' 2" (7.4) | Overall length of undercarriage | BH | 29' 3" (8.9) | Radius of bucket teeth at maximum height |
| N | 10" (254mm) | Ground clearance (per SAE J1234) | BJ | 22' 8" (6.9) | Minimum radius of bucket teeth at maximum bucket pivot height |
| P | 22" (564mm) | Center of rear tandem to axis of rotation | | | |
| Q | 52" (1.3) | Distance between centers of tandem axles | | | |
| R | 14' 3" (4.3) | Wheelbase | | | |
| S | 5' 4" (1.6) | Center of rear axle to rear of frame (step) | | | |
| V1 | 6' 7" (2.0) | Tread, rear axles (285/75R24.5 tires) | | | |
| V2 | 7' 0" (2.1) | Tread, front axle (385/65R22.5 tires) | | | |
| AA | 33' 8" (10.3) | Maximum radius at groundline (165° pivot) | | | |
| AB | 24' 1" (7.3) | Maximum digging depth | | | |
| AC | 22' 4" (6.8) | Maximum depth for 8' level cut | | | |
| AD | 8' 7" (2.6) | Minimum radius of 8' level cut at depth "AC" | | | |
| AF | 3' 6" (1.1) | Maximum depth of vertical wall which can be excavated | | | |
| AG | 14' 6" (4.4) | Minimum level cut radius with bucket flat on groundline | | | |
| AH | 10' 5" (3.2) | Minimum radius at groundline | | | |
| AK | 6' 11" (2.1) | Boom pivot to groundline | | | |
| AL | 23" (584mm) | Boom pivot to axis of rotation | | | |
| AP | 46" (511mm) | Bucket tooth radius | | | |
| AQ | 30° Up & 70° Dn | Boom pivot angle | | | |
| AS | 165° | Bucket pivot angle | | | |

Rated bucket tangential force with 36" (914mm) bucket: 24,900 lb (111KN)
 Rated telescoping boom crowd force: 24,500 lb (109 KN)

WEIGHT

Approximate working weight, fuel tank half full-
 6 x 4: 54,948 lb (24,924 kg)
 6 x 6: 56,868 lb (25,795 kg)

Specifications subject to change without notice.

Optional Equipment

Vandalism protection kit including window covers.

Intake air pre-cleaner.

Exhaust spark arrestor.


Strobe light.

Block heater.


Additional battery.

Tilt steering column.


Auxiliary Hydraulics - Additional hosing and piping for hydraulic powered attachments. [Maximum pressure 4800 psi (33,095 kPa) Maximum flow 30 GPM (114 L/min)]




| | | Cu. yd. | m ³ |
|-----------|-------------------------------|---------|----------------|
| 8045-6020 | 24" (610mm) Excavating bucket | 3/8 | .31 |
| 8045-6021 | 30" (762mm) Excavating bucket | 1/2 | .41 |
| 8045-6022 | 36" (914mm) Excavating bucket | 5/8 | .54 |
| 8045-6023 | 42" (1.07m) Excavating bucket | 3/4 | .64 |
| 8045-6024 | 48" (1.22m) Excavating bucket | 1 | .76 |
| 8065-6117 | 48" (1.22m) Excavating bucket | 1.5 | 1.15 |

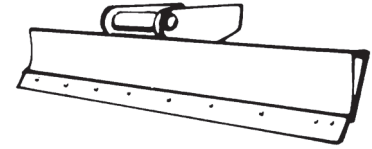


8065-6024 8' (2.4m) Grading blade

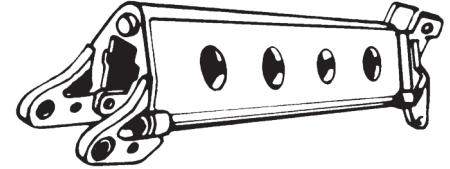


8065-5028 4' (1.2m) Boom extension
8065-5029 6' (1.8m) Boom extension
8065-5030 8' (2.4m) Boom extension
8065-5031 12' (3.7m) Boom extension

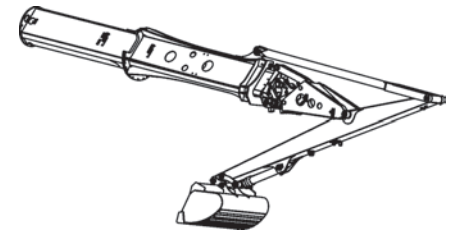


8055-5001 Telestick attachment



NEW Tree Limb Shear Attachment

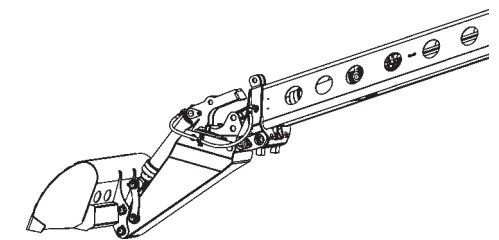


8045-5009 6' (1.8 m) Live Boom




8045-5006 Fixed thumb grapple

Attachments


Quick change and reversible buckets fabricated of steel plate, with high strength, low alloy cutting edges and wear strips. Standard attachments available for wide range of applications. Capacities shown are in heaped cu. yd.



| | | Cu. yd. | m ³ |
|-----------|------------------------------|---------|----------------|
| 8065-6104 | 15" (381mm) Trenching bucket | 1/5 | .15 |
| 8065-6012 | 21" (533mm) Trenching bucket | 1/4 | .19 |



8065-6102 40" (1.02m) Pavement removal bucket
8065-6119 48" (1.22m) Pavement removal bucket



| | | Cu. yd. | m ³ |
|-----------|-----------------------------|---------|----------------|
| 8065-6007 | 60" (1.52m) Ditching bucket | 7/8 | .73 |
| 8065-6006 | 66" (1.68m) Ditching bucket | 1 | .76 |
| 8065-6002 | 72" (1.83m) Ditching bucket | 1 1/8 | .87 |
| 8065-6118 | 72" (1.83m) Ditching bucket | 1.6 | 1.22 |



8065-6013 72" (1.83m) Dredging bucket

It is Gradall Policy to continually improve its products. Therefore designs, materials and specifications are subject to change without notice and without incurring any liability on units already sold. Units shown may have optional equipment.

GRADALL®

406 Mill Ave. SW, New Philadelphia, Ohio 44663
Phone: 330-339-2211 Fax: 330-339-8468
www.gradall.com



Certified ISO 9001